
Service Manual

HD-9ST

Service Parts & Diagrams

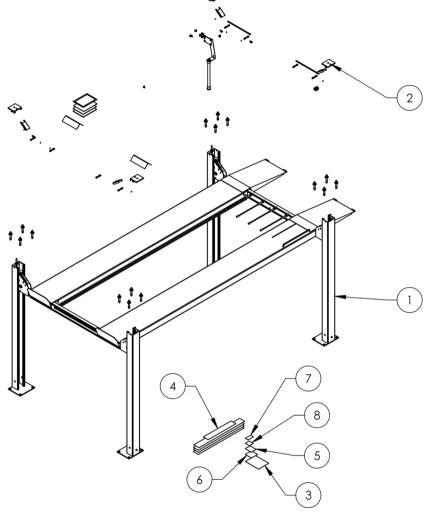

BendPak SKU 5260526 HD-9ST Four-Post Car Lift Version K 06/02/2016

This guide is a troubleshooting reference used for maintaining and servicing your BendPak product. It provides comprehensive information on identifying serviceable parts and components and assists in troubleshooting problems and performing assembly/disassembly procedures.



BendPak, Inc. Corporate Office

1645 Lemonwood Drive Santa Paula, CA 93060 USA Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 info@bendpak.com

Customer Service Desk / Warranty

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 customerservice@bendpak.com

Parts Orders

Customer Service Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 parts@bendpak.com


Domestic Sales & Service

USA Sales Representatives Office Tel: 1-805-933-9970 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160 sales@bendpak.com

International Sales & Service

bpkexports@bendpak.com


Office Tel: 1-805-933-9970 Exports Department: 1-805-933-9970 Ext. 192 Toll Free US/Canada: 1-800-253-2363 Fax: 1-805-933-9160

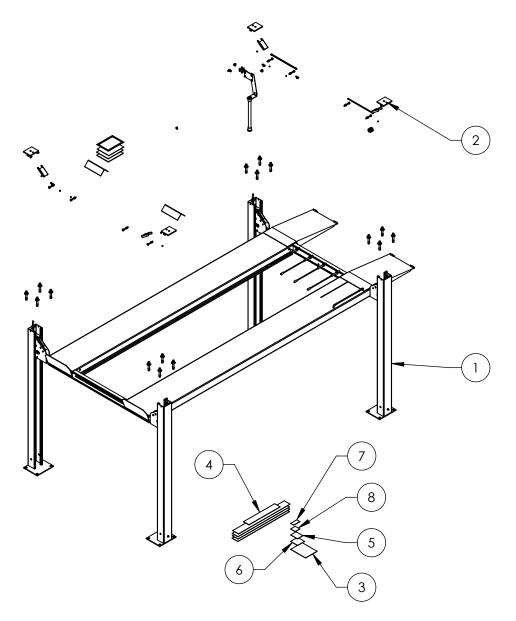

REVISION								
REV	DESCRIPTION	DATE	EDITED BY	ECO#				
С	ADDED 5905103, 5905200, 5905402, 5905465, 5905940, AND 5930605, UPDATED BOM REVISIONS	08/13/2015	TM	00683				
D	REMOVED 5930605, ADDED 5905952 UPDATED BOM REVISIONS	11/25/2015	JM	00740				
Е	REPLACED 5905952 WITH 5905953, UPDATED BOM REVISIONS	12/30/2015	JM	00741				

ITEM NO.	PART N	NUMBER		DE:	SCRIPTION		QTY.	REV
1	524	5395	Н	ID-9ST LIFT	SUPERSTRUCTU	RE	1	E
2	525	0188		PARTS	S BOX HD-9ST		1	Е
3	590	5103		WARNII	NG ALI/WL 200		1	
4	590	5200		4 POST DE	CAL KIT, LESS A	LI	1	В
5	590	5402		MAX (CAP DANGER		1	
6	590	5465		MANUF	ACTURER LABEL		1	
7	590	5940		PRODU	CT DATA LABEL		1	
8	8 5905953		SERIA	L NUMBE	R INTERIOR TAG	PLATE	1	

O NOT SCALE	DRAWING		NAME	DATE	Γ.
		DRAWN	TM	08/12/2014	
DIMENSIONS A	DE IN MAM	CHECKED	=	=	ľ
DIMENSIONS ARE IN MINI		THIRD ANGLE PROJECTION		DJECTION	
		l i			



TITLE:	HD-9ST PRODUCTION LIFT VER K (CE CERT)


	SILL	١.
PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. ANY	Α	
REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.		


	En 1 VER R (SE SERI)					
IZE	DWG. NO.		REV			
A	5260526		Е			
SCALE: 1:50			EET 1 OF 2			

BendPak, 1645 LEMONWOOD DR. SANTA PAULA, CA 93060


NOTE: UNLESS OTHERWISE SPECIFIED.

- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING ALL LABELS TO BE APPLIED TO POSTS AFTER PAINTING. SEE ATTACHED LABEL PLACEMENT SHEET
- 2. 3.

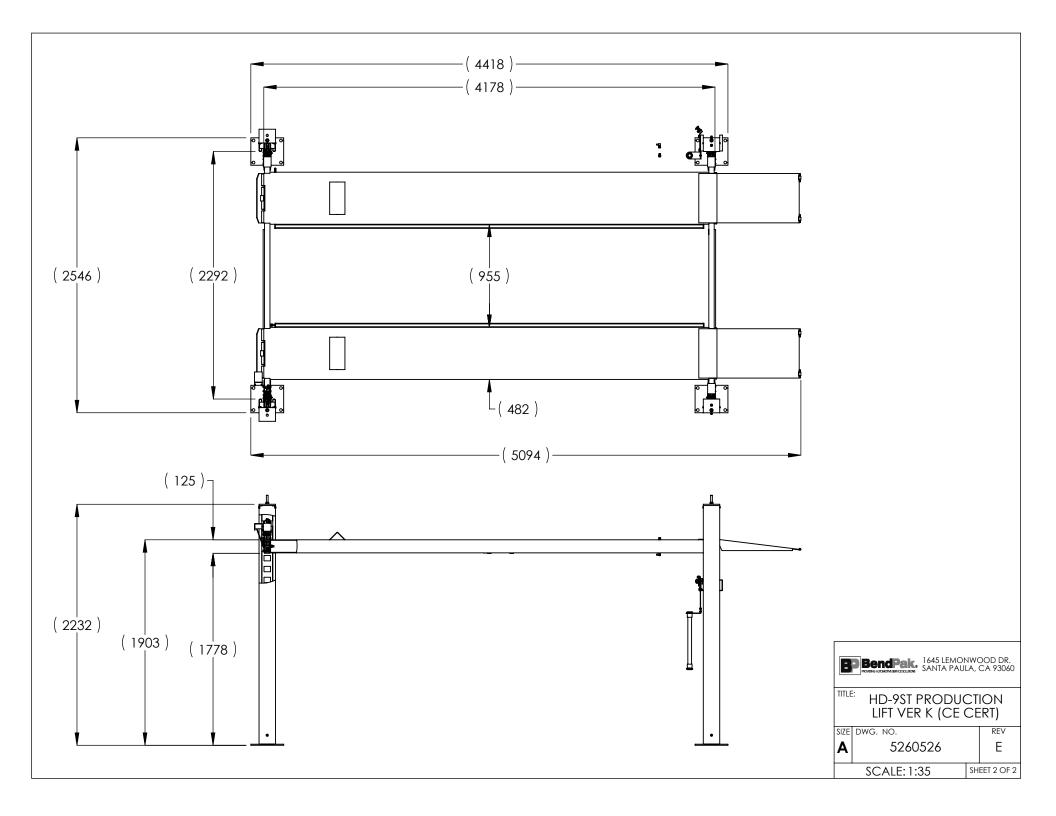

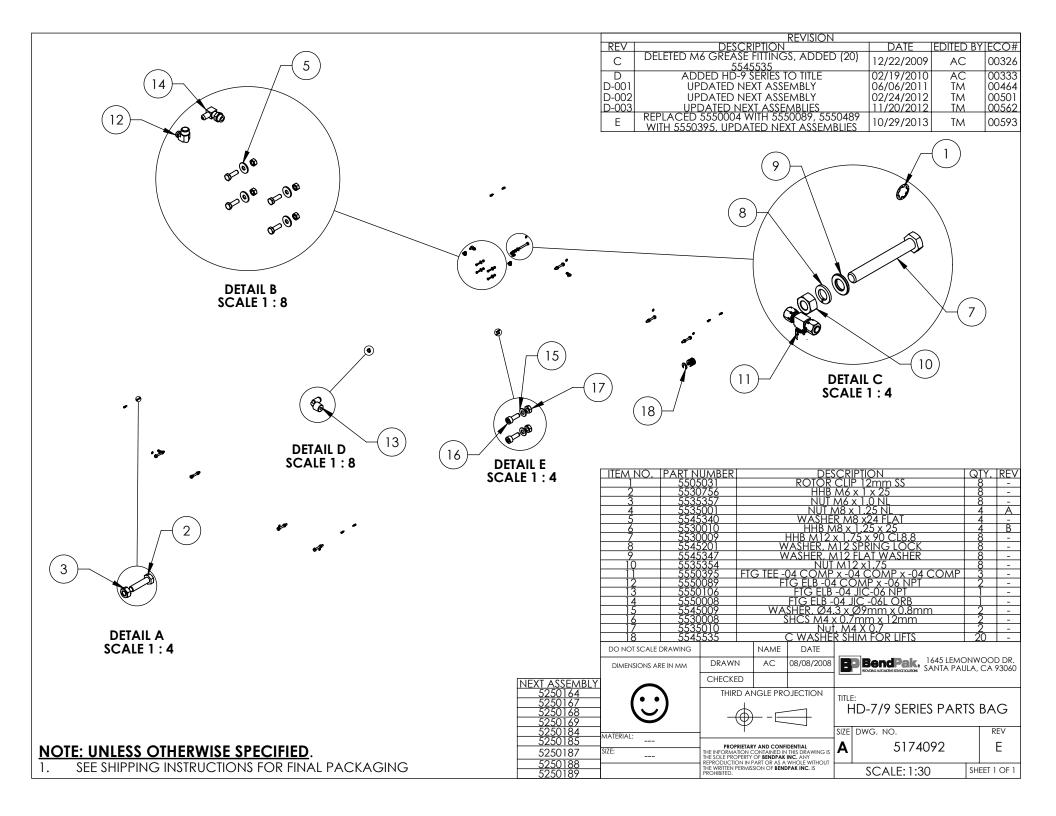

REVISION						
REV	DESCRIPTION	DATE	EDITED BY	ECO#		
D	UPDATED NEXT ASSEMBLY, ADDED 5550486	02/24/2010	AC	00333		
D-001	UPDATED NEXT ASSEMBLY	01/21/2011	TM	00439		
D-010	UPDATED NEXT ASSEMBLIES	07/24/2013	TM	00611		
Е	REPLACED 5550481 WITH 5550087	10/29/2013	TM	00593		
F	REPLACED 5590240 WITH 5590175, UPDATED NEXT ASSEMBLIES	05/05/2015	MR	00683		

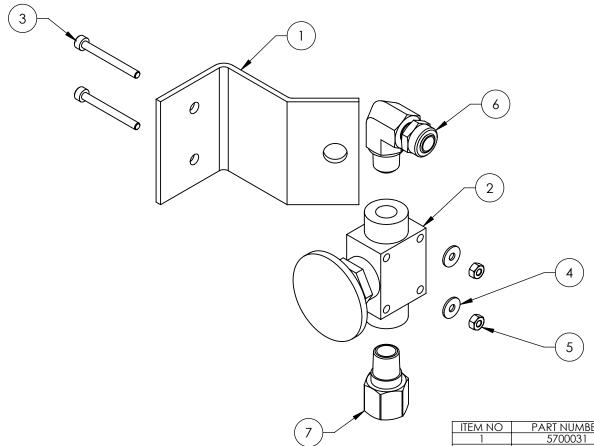


ITEM NO	PART NUMBER	DESCRIPTION		REV
1	5700031	ZERO ANGLE MTG BRACKET	1	С
2	5590175	PUSH BUTTON AIR VALVE	1	В
3	5530043	SHCS M3 x 0.5 x 30	2	-
4	5545024	WASHER M3 x 9mm	2	-
5	5535020	NUT M3 x 0.5 NL	2	-
6	5550087	FTG ELB -04 COMP x -02 NPT	1	-
7	5550486	FTG NPL -02 NPT x -04 F NPT	1	-

DO NOT SCALE DRAWING NAME DATE DRAWN AC 3/14/2008 CHECKED СА 09/02/2015

DIMENSIONS ARE IN MM

THIRD ANGLE PROJECTION



PROPRIETARY AND CONFIDENTIAL	1
THE INFORMATION CONTAINED IN THIS DRAWING IS	ı
THE SOLE PROPERTY OF BENDPAK INC. ANY	ı
REPRODUCTION IN PART OR AS A WHOLE WITHOUT	ŀ
THE WRITTEN PERMISSION OF BENDPAK INC. IS	ı
PROHIBITED.	н

BPBendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

PUSH BUTTON AIR ASSEMBLY


SIZE DWG. NO. REV F 5215096 SCALE: 2:3 SHEET 1 OF 1


NOTE: UNLESS OTHERWISE SPECIFIED. 1. ASSEMBLE ITEMS AS SHOWN



	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
В	UPDATED BOM REVISIONS, UPDATED NEXT ASSEMBLY	11/14/2008	AC	00174
С		04/22/2010	TM	00351
D	UPDATED TITLE TO REFLECT WHERE USED, UPDATED BOM REVISIONS	06/10/2010	AC	00366
D-001 D-002	UPDATED NEXT ASSEMBLY UPDATED NEXT ASSEMBLY	01/20/2011 06/06/2011	TM TM	00439 00464



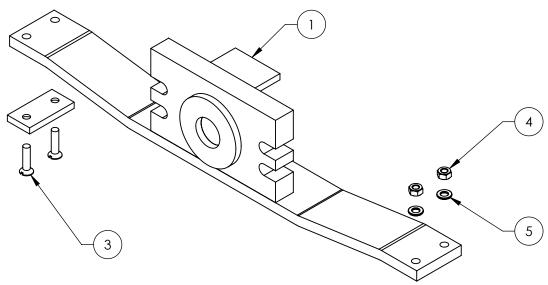



	ITEM NO	PART NUMBER	DESCRIPTION	QTY	REV
	1	5600901	HD-7500/9 SERIES CYLINDER FLANGE ARM WELDMENT	1	D
	2	5715090	CYL. FLANGE ARM SLIDE	2	Α
Γ	3	5530069	FHS M6 x 1.0 x 25	4	-
	4	5535357	NUT M6 x 1.0 NL	4	-
Γ	5	5545005	M6 FLAT WASHER	4	-

DO NOT SCALE DRAWING

DIMENSIONS ARE IN MM

DRAWN

CHECKED

MT

O7/06/2011

THIRD ANGLE PROJECTION

MATERIAL:

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BRADPAK INC. ANY
ERPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS

HD-7500/9 CYLINDER
FLANGE ARM ASSEMBLY
SIZE DWG. NO. REV

BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060


5215129

SCALE: 1:3 SHEET 1 OF 1


D

NOTE: UNLESS OTHERWISE SPECIFIED.

1. ASSEMBLE ITEMS AS SHOWN

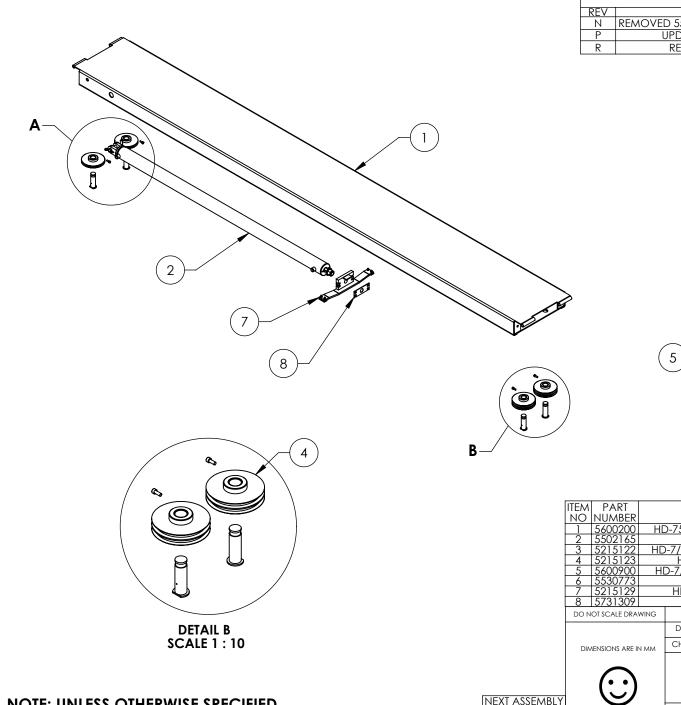

	REVISION							
REV	DESCRIPTION	DATE	EDITED BY	ECO#				
Ν	REMOVED 5505350, 5545031 AND 5535026	01/13/2015	MR	00675				
Р	UPDATED BOM REVISION	03/30/2015	MR	00683				
R	REMOVED (4) 5550025	11/25/2015	JM	00740				

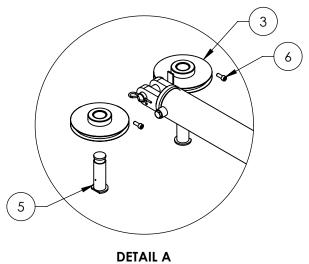

SCALE 1:10

ITEN	A PART NUMBER	DESCRIPTION	QTY	REV
1	5600200	HD-7500BL/9/9ST/9SW POWER SIDE RAMP WELDMENT	1	F
2	5502165	Cylinder assembly Ø3.0 x 70	1	G
3	5215122	HD-7/7500/9 SERIES SINGLE SHEAVE ROLLER ASSEMBLY	2	D
4	5215123	HD-7/7500/9 SERIES TWIN SHEAVE ASSEMBLY	2	D
5	5600900	HD-7/7500/9 SERIES RAMP SHEAVE SHAFT WELDMENT	4	D
6	5530773	SHCS M8x1.25x20mm L	4	-
7	5215129	HD-7500/9 CYLINDER FLANGE ARM ASSEMBLY	1	D
8	5731309	CABLE RETAINER PLATE	1	Α

NAME DATE BP BendPak, 1645 LEMONWOOD DR. SANTA PAULA, CA 93060 DRAWN AC 11/13/2008 CHECKED THIRD ANGLE PROJECTION

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTINUED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDAYA INC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN PERMISSION OF BENDPAK INC. IS
PROHIBITED.

HD-7500BL/9/9ST/9SW POWER SIDE RAMP **ASSEMBLY** REV


SIZE DWG. NO. 5215190


SCALE: 1:25 SHEET 1 OF 2


R

NOTE: UNLESS OTHERWISE SPECIFIED.


- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING
- ASSEMBLE ITEMS AS SHOWN



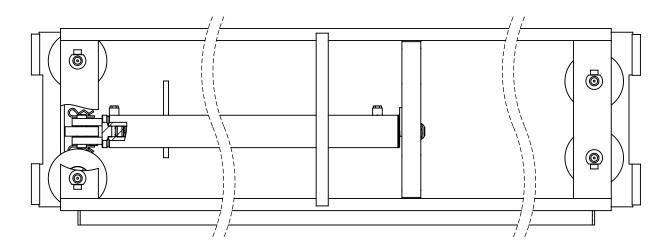



	55,40,61			
	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
С	UPDATED TITLE TO REFLECT WHERE USED UPDATED NEXT ASSEMBLY	02/25/2010	AC	00333
D	UPDATED TITLE TO REFLECT WHERE USED	06/10/2010	AC	00366
	UPDATED BOM REVISIONS			
	REPLACED 5535112 WITH 5535357			
D-001	UPDATED NEXT ASSEMBLY	06/06/2011	TM	00464
D-002	UPDATED NEXT ASSEMBLIES	10/27/2011	TM	00487
E	UPDATED BOM REVISION	08/22/2012	TM	00541
E-001	UPDATED NEXT ASSEMBLIES	11/19/2012	TM	00562
E-002	UPDATED NEXT ASSEMBLIES	05/20/2013	TM	00593
E-003	UPDATED NEXT ASSEMBLY	11/20/2013	TM	00626
E-004	UPDATED NEXT ASSEMBLIES	06/10/2014	TM	00648
E-005	UPDATED NEXT ASSEMBLIES	08/14/2014	TM	00664

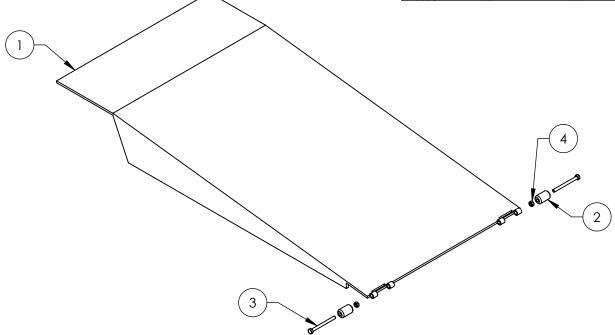



ITEM	PART	DESCRIPTION	QTY	RFV
NO	NUMBER		α	11.
1	5600891	HD-7500BL/7500BLX/ 9/9N/9NX/9ST/9STX/9XW DRIVE UP RAMP WELDMENT	1	D
2	5716149	HD-7500/9, HD/S-14 SERIES DRIVE UP RAMP PLASTIC ROLLER	2	F
3	5530005	HHB M6 x 1 x 70	2	-
4	5535357	NUT M6 x 1.0 NL	2	-


	4 553535/		1	<u>101 M6 x</u>	<u>1 0. l</u>	<u>NL</u>	2 -
CALENT ASSET ASSET	DO NOT SCALE DRAWING		NAME	DATE			
NEXT ASSEMBLY 5245275		DRAWN	AC	11/13/2008	В	BendPak, 1645 LEMO	DNWOOD DR. JLA, CA 93060
5245381 5245382	DIMENSIONS ARE IN MM	CHECKED					
5245383		THIRD AN	NGLE PRO	DJECTION	TITI F	: -	
5245384					ΗĈ	: D-7500BL/BLX, 9/ST	/STX/XW
5245386	(••)	—————————————————————————————————————	∈		D	RIVE UP RAMP AS	SEMBLY
5245388		1			SIZE	DWG. NO.	REV
5245392		PROPRIETAR THE INFORMATION O	Y AND CONFI		A	5215193	F
5245393		THE SOLE PROPERTY REPRODUCTION IN F	OF BENDPAK	INC. ANY	_ `		
5245395 5245396		THE WRITTEN PERMIS: PROHIBITED.				SCALE: 1:8	SHEET 1 OF 1


NOTE: UNLESS OTHERWISE SPECIFIED.


- SEE SHIPPING INSTRUCTIONS FOR FINAL PACKAGING ASSEMBLE ITEMS AS SHOWN
- 2.

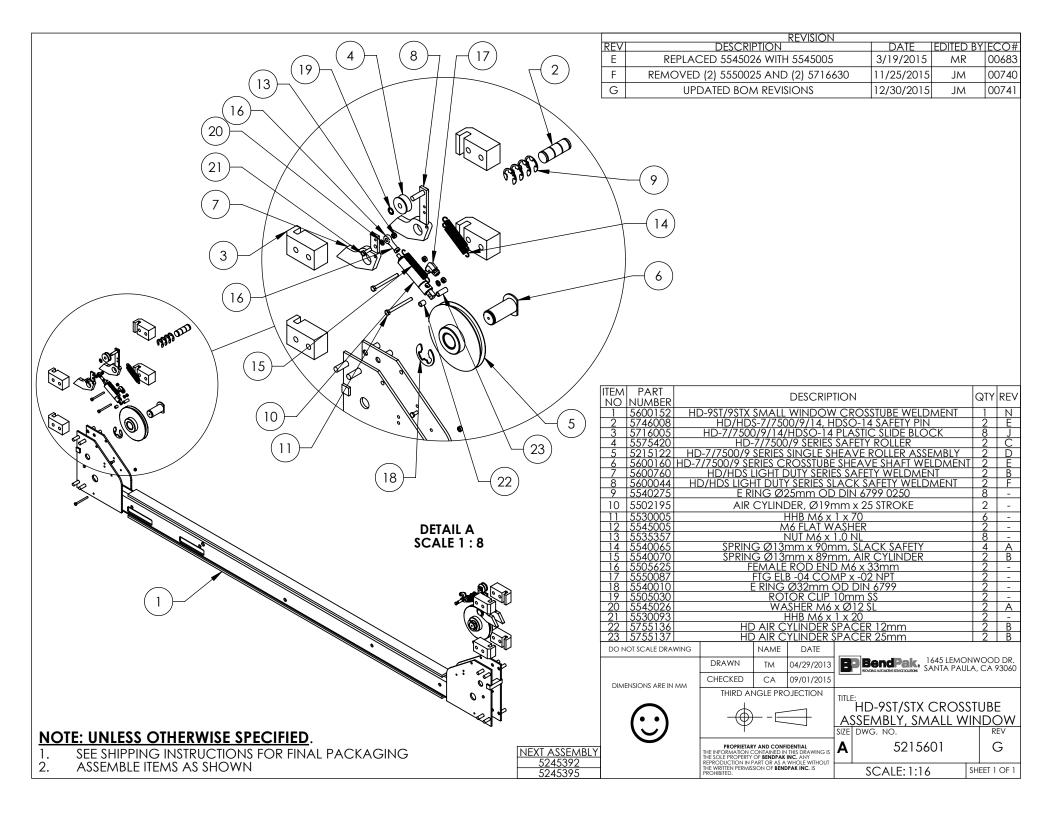

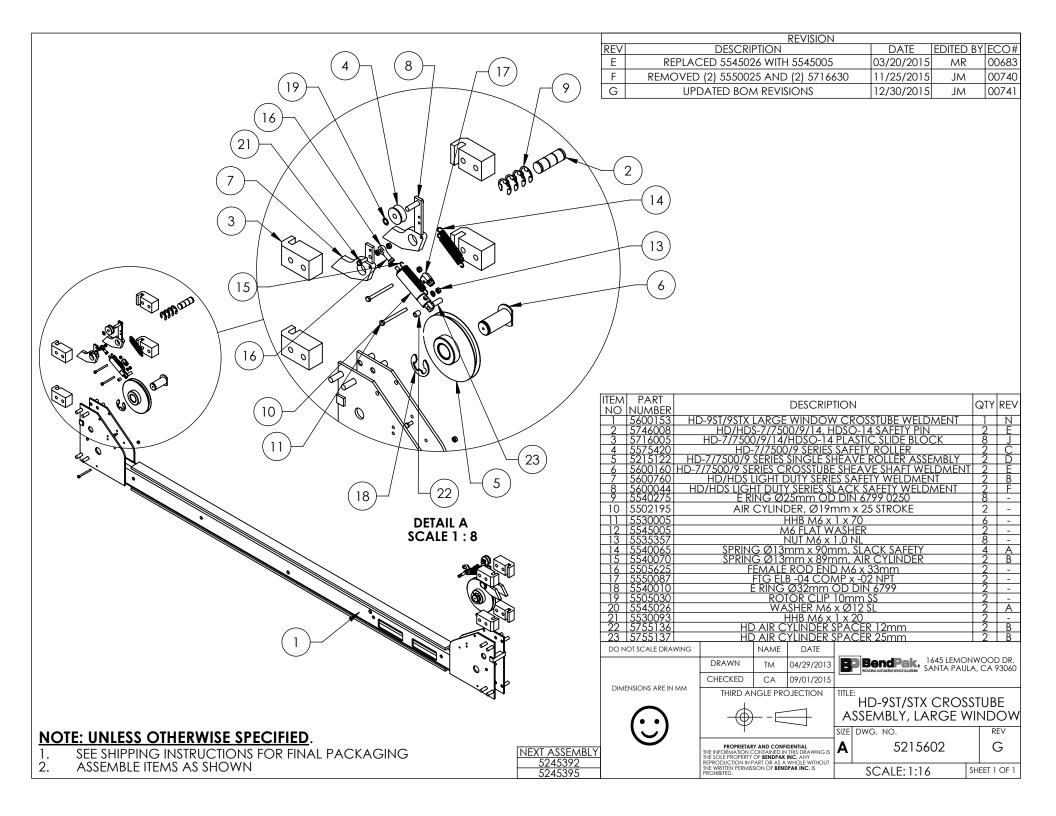


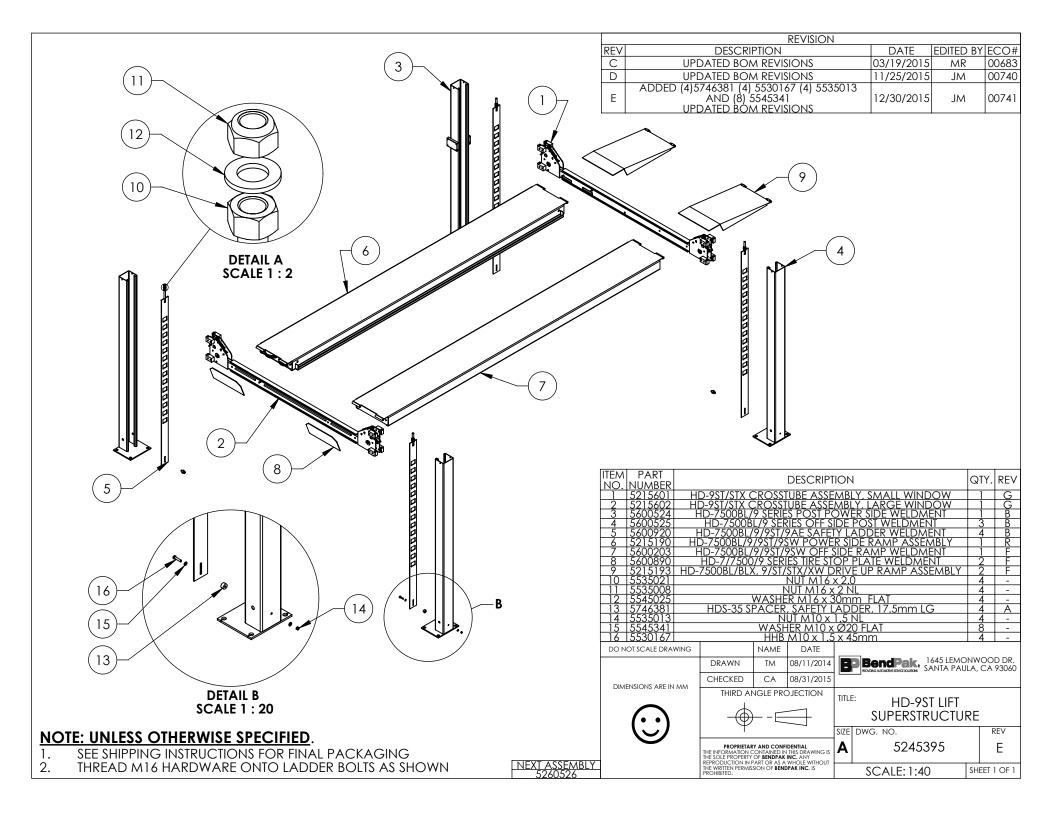

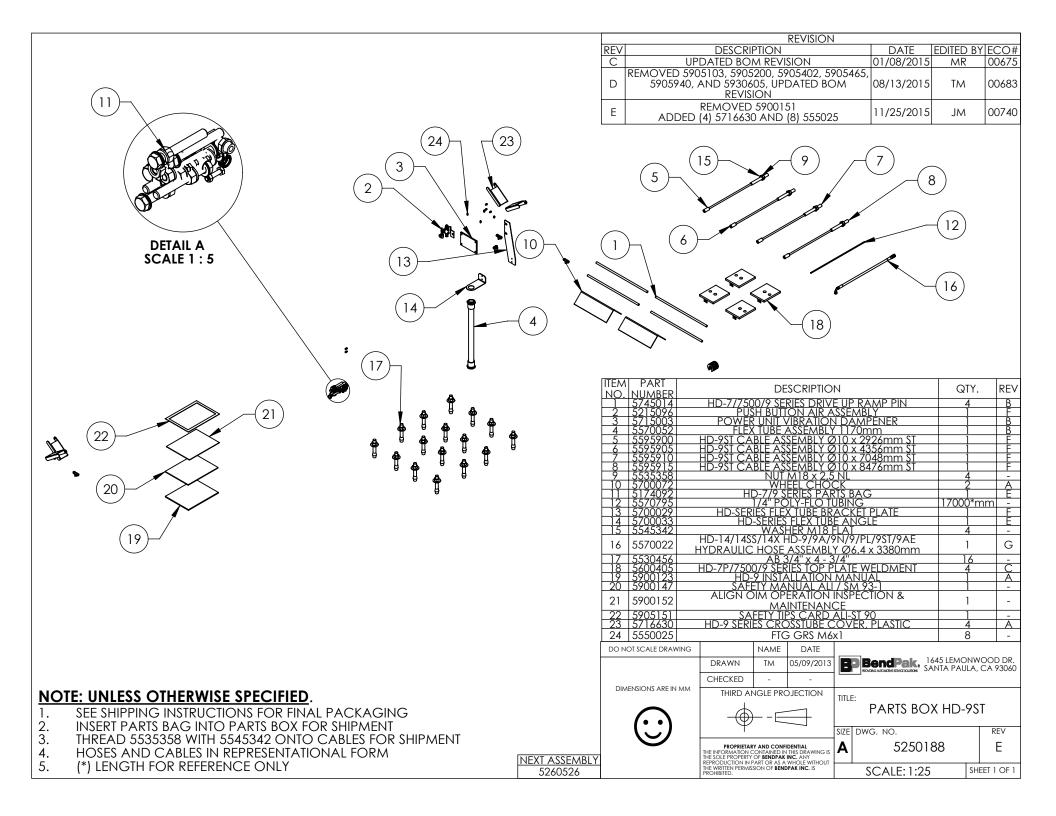

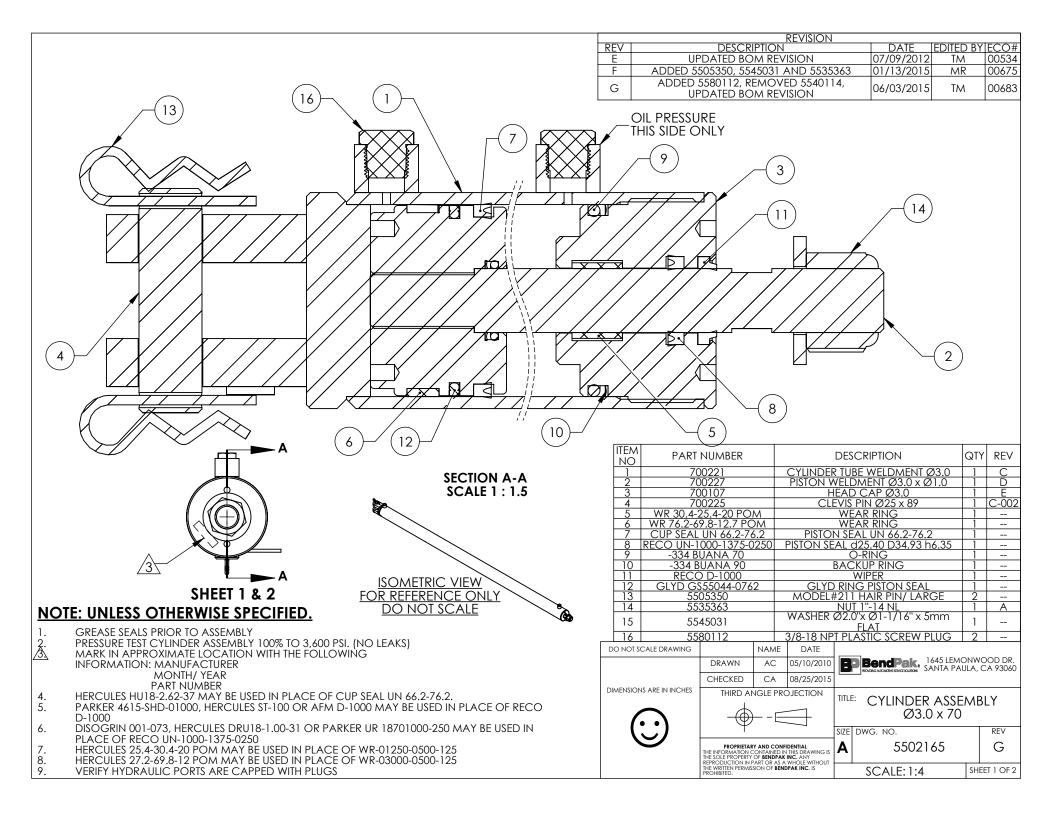

	REVISION			
REV.	DESCRIPTION	DATE	EDITED BY	ECO#
Е	UPDATED NEXT ASSEMBLY, NEXT ASSEMBLIES	12/11/2008	AC	00256
	NOW IN NAME			
E-001	UPDATED NEXT ASSEMBLY	01/12/2009	AC	00174
E-002	UPDATED NEXT ASSEMBLY	07/27/2009	AC	00249
E-003	UPDATED NEXT ASSEMBLY	02/24/2010	AC	00333
F	UPDATED TITLE TO REFLECT WHERE USED,	01/20/2011	TM	00439
	UPDATED NEXT ASSEMBLY			
F-001	UPDATED NEXT ASSEMBLY	06/06/2011	TM	00464
F-002	UPDATED NEXT ASSEMBLIES	11/20/2012	TM	00562
F-003	UPDATED NEXT ASSEMBLIES	05/20/2013	TM	00593
G	REPLACED 5570110 WITH 5570129	1/9/2015	MR	00675

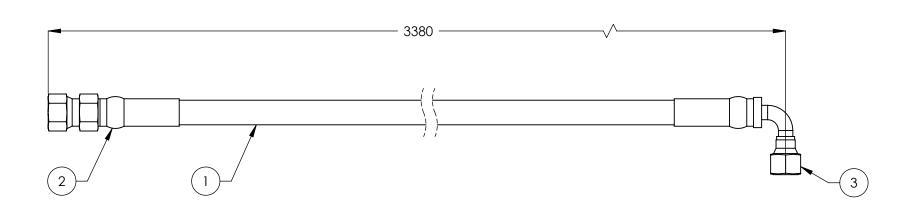

ITEM NO.	PART NUMBER		DESCRI	PTION	QTY.	REV
1	5570129	Ø6.4	Ø6.4 ID HYDRAULIC HOSE			Α
2	5550325	FTG NI	PL Ø1/4 C	RIMP x -04 JIC	1	-
3	5550345	FTG EL	FTG ELB Ø1/4 CRIMP x -04 JIC			-
		114145	D 4.TE		•	

DO NOT SCALE DRAWING		NAME	DATE	
	DRAWN	AC	12/17/2007	
	CHECKED	VB	2/06/2015	
DIMENSIONS ARE IN MM TOI FRANCES:	THIRD ANGLE PROJECTION			
0. = ±1.5 0.0 = ±0.5			\rightarrow	
ANGULAR: 0. = ±2°	l Ψ	_		
SURFACE FINISH 1.6 ISO Ra µm				
FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED	PROPRIETAR THE INFORMATION O	Y AND CONFI		

HD-14/14SS/14X HD-9/9A/9N/9/PL/9ST/9AE HYDRAULIC HOSE ASSEMBLY Ø6.4 x 3380mm

BPBendPak 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

SIZE DWG. NO.


REV 5570022 G **SCALE: 1:2** SHEET 1 OF 1

NOTE: UNLESS OTHERWISE SPECIFIED.

FOR ITEM 1 SPECIFICATIONS REFER TO PART SPECIFICATION FORM (*)ITEM 1 QTY FOR REFERENCE ONLY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BENDAYA KINC. ANY
REPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN FERMISSION OF BENDPAK INC. IS
PROHIBITED.

	REVISION			
REV	DESCRIPTION	DATE	EDITED BY	ECO#
Α	PRODUCTION RELEASE	01/18/2008	AC	00137
В	UPDATED TUBE TO NEW STYLE, UPDATED	12/11/2008	AC	00174
	NEXT ASSEMBLY			
B-001	UPDATED NEXT ASSEMBLY	05/04/2009	AC	00277
B-002	UPDATED NEXT ASSEMBLY	02/24/2010	AC	00333
B-003	UPDATED NEXT ASSEMBLY	06/18/2010	AC	00366
B-004	UPDATED NEXT ASSEMBLIES	05/22/2013	TM	00593

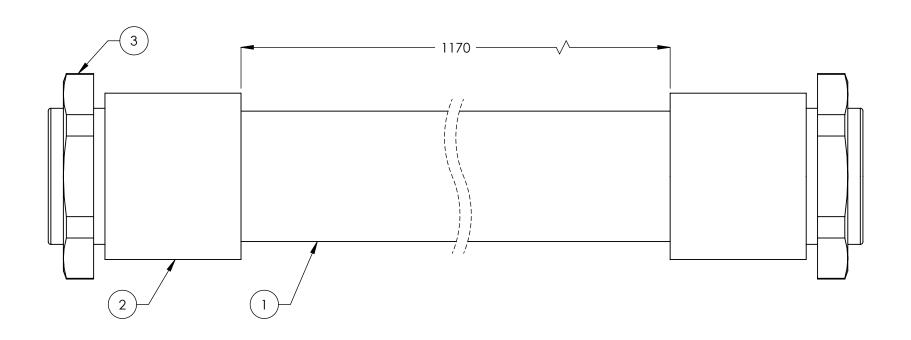

ITEM NO	PART N	UMBER		DESCRIPTION			QTY	REV
1	5570	0053		PE FLEX TUBE Ø34.5xØ29			1	-
2	5555	5555	WQ	G1-M36/	AD34.5 CONNE	CTOR	2	-
3	5535	5050		PLASTIC NUT M36 x 2			2	-

)		,000		1 1 (011)	0 1 10	1 11100 X Z			
DO NOT SCALE	DRAWING		NAME	DATE					
DIMENSIONS ARE TOLERANCES:	IN MM	DRAWN	MT	01/18/2008	B	BendPak.	1645 LEMO SANTA PAU		
0.0	$= \pm 1.5$ = ± 1.0	CHECKED							
0.000	$= \pm 0.25$ = ± 0.13	THIRD A	NGLE PRO	DJECTION	TITLE:	ELE?	(TUBE		
ANGULAR: MACH	_	4	\ _						
SURFACE FINISH 1 FOR MACHINED S	URFACES"	-(4))— - —	ightharpoonup		ASSEMBL	.1 11/0	111111	
 UNLESS OTHERWIS	E SPECIFIED				SIZE L	DWG NO			RFV

NOTE: UNLESS OTHERWISE SPECIFIED.

- FOR ITEM 1 SPECIFICATIONS REFER TO PART SPECIFICATION FORM (*)ITEM 1 QTY FOR REFERENCE ONLY
- 2.

	UNLESS
NEXT ASSEMBLY	MATERI
5250185	CIZE
5250186	SIZE:
5250188	
5250189	


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS
THE SOLE PROPERTY OF BANDAYA INC. ANY
EEPRODUCTION IN PART OR AS A WHOLE WITHOUT
THE WRITTEN FERMISSION OF BENDPAK INC. IS
PROHIBITED.


SIZE DWG. NO. 5570052


SCALE: 1:1 SHEET 1 OF 1


REV

В

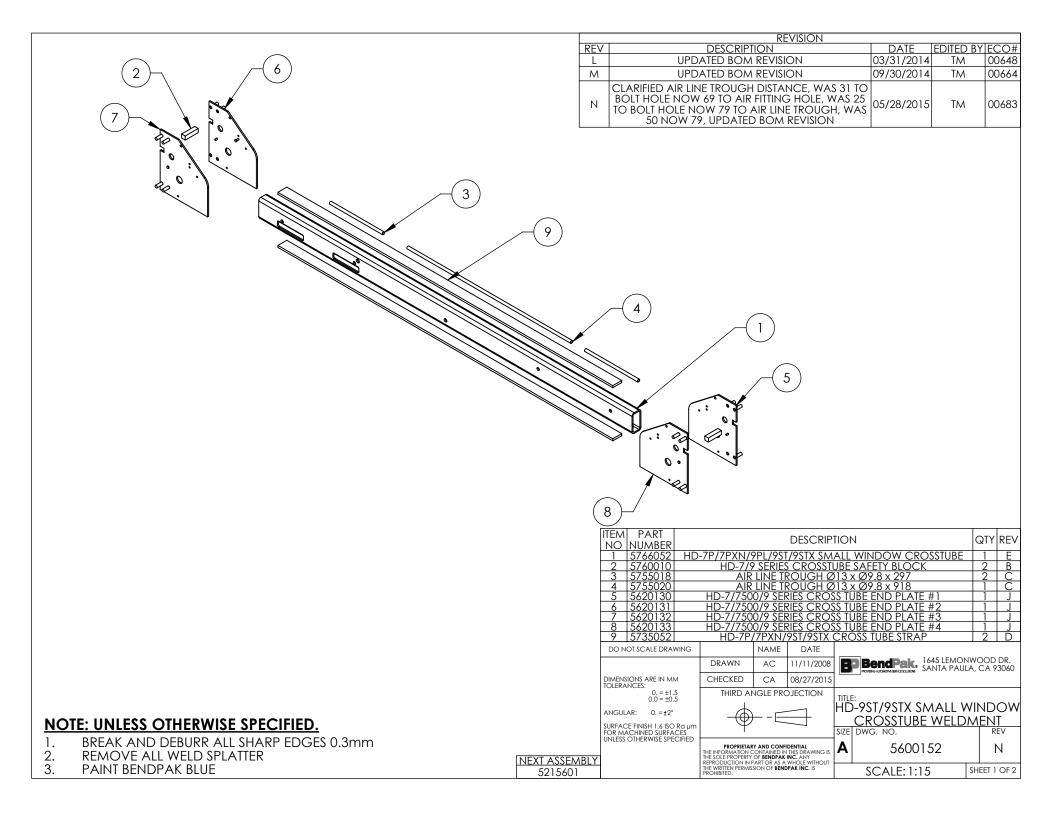

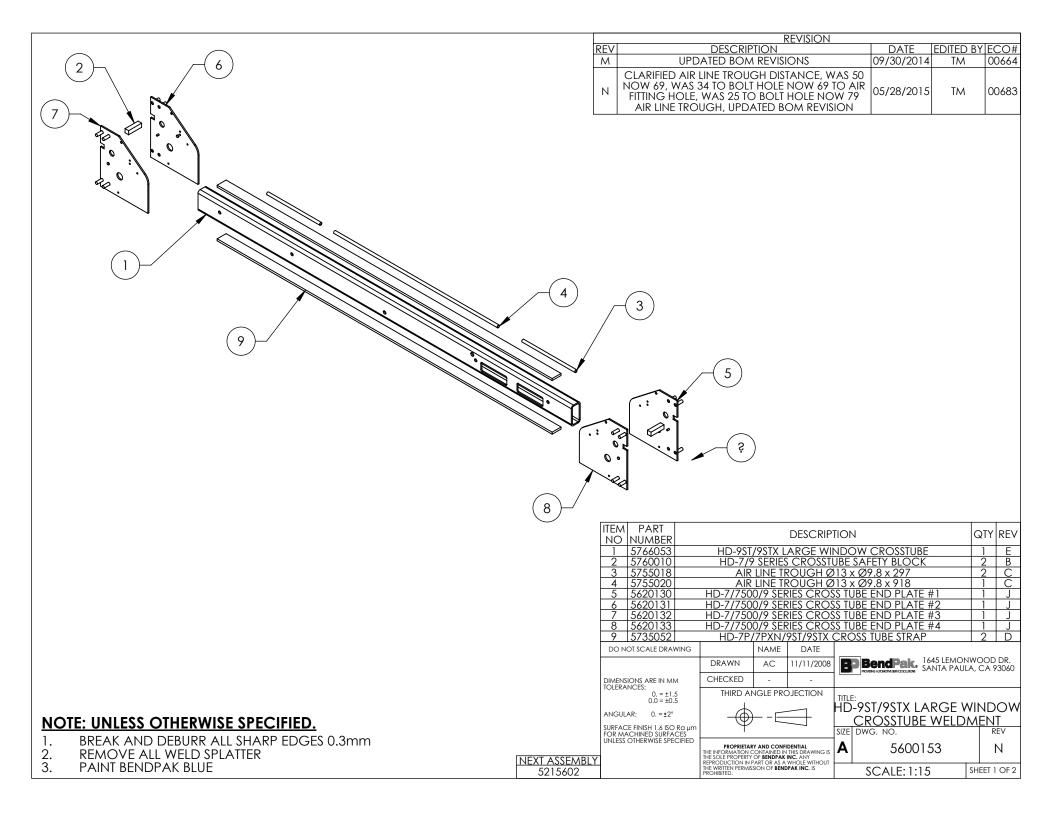

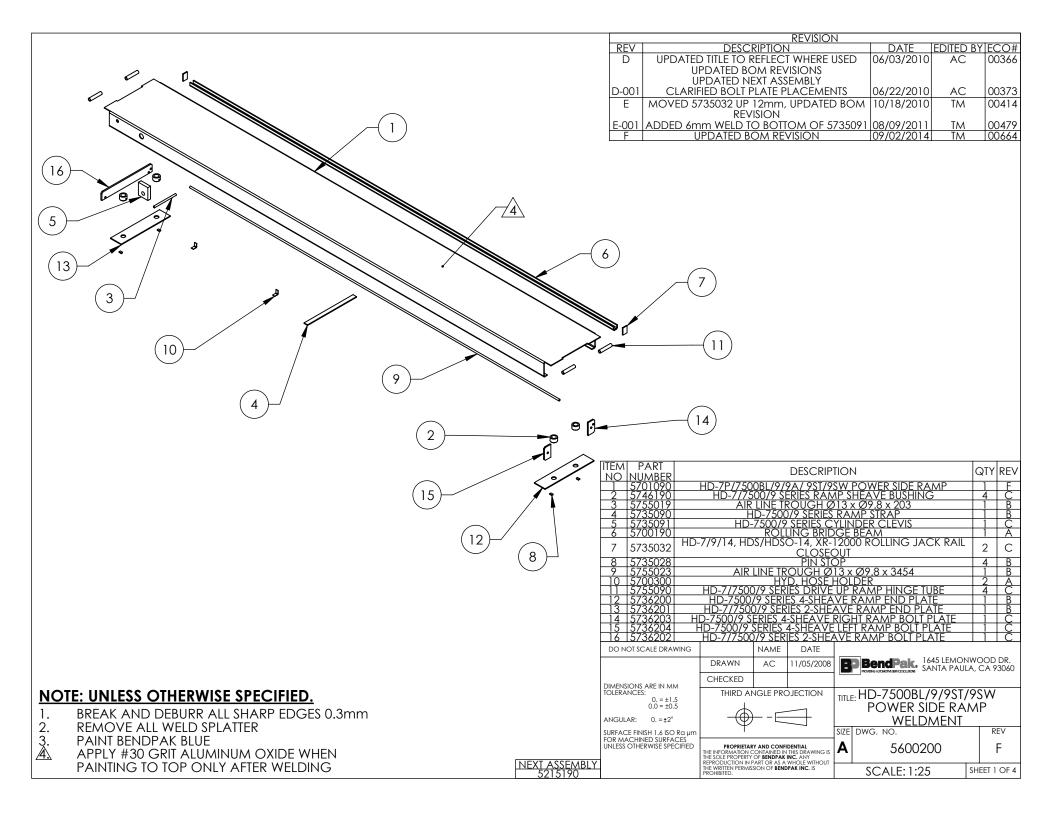

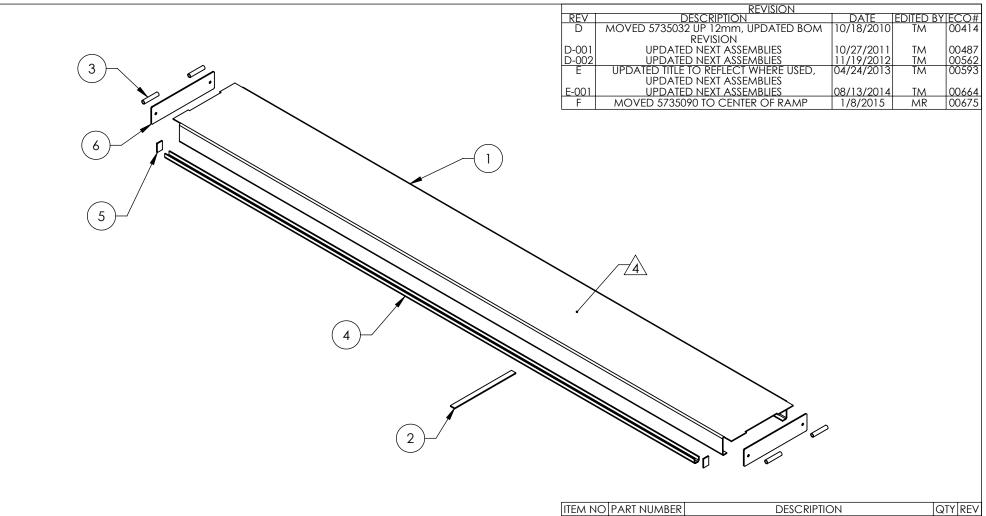

1	5701467	HD-7/7500/9 SERIES OFF SIDE RAMP	1	С
2	5735090	HD-7500/9 SERIES RAMP STRAP	1	В
3	5755090	HD-7/7500/9 SERIES DRIVE UP RAMP HINGE TUBE	4	С
4	5700190	ROLLING BRIDGE BEAM	1	Α
5	5735032	HD-7/9/14, HDS/HDSO-14, XR-12000 ROLLING JACK RAIL CLOSEOUT	2	С
6	5736090	HD-7/7500/9 SERIES RAMP END PLATE	2	С

DO NOT SCALE DRAWING NAME DATE DRAWN AC 11/05/2008 CHECKED CA 08/27/2015 DIMENSIONS ARE IN MM TOLERANCES: THIRD ANGLE PROJECTION 0. = ±1.5 0.0 = ±0.5

"H	"HD-7500BL/9/9ST/9SW OFF			
SIDE RAMP WELDMENT				
SIZE	DWG. NO.	REV		

BP BendPak. 1645 LEMONWOOD DR. SANTA PAULA, CA 93060

PAINTING TO TOP ONLY AFTER WELDING

PAINT BENDPAK BLUE APPLY #30 GRIT ALUMINUM OXIDE WHEN

BREAK AND DEBURR ALL SHARP EDGES 0.3mm

NOTE: UNLESS OTHERWISE SPECIFIED.

REMOVE ALL WELD SPLATTER


2.

3. <u>4.</u>

NEXT ASSEMBLY ANGULAR: 0. = ±2° SURFACE FINISH 1.6 ISO Ra µm 5245383 FOR MACHINED SURFACES UNLESS OTHERWISE SPECIFIED 5245390 5245395 5245396

PROPRIETARY AND CONFIDENTIAL THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF BENDPAK INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF BENDPAK INC. IS PROHIBITED.

REV 5600203 SHEET 1 OF 3 **SCALE: 1:20**

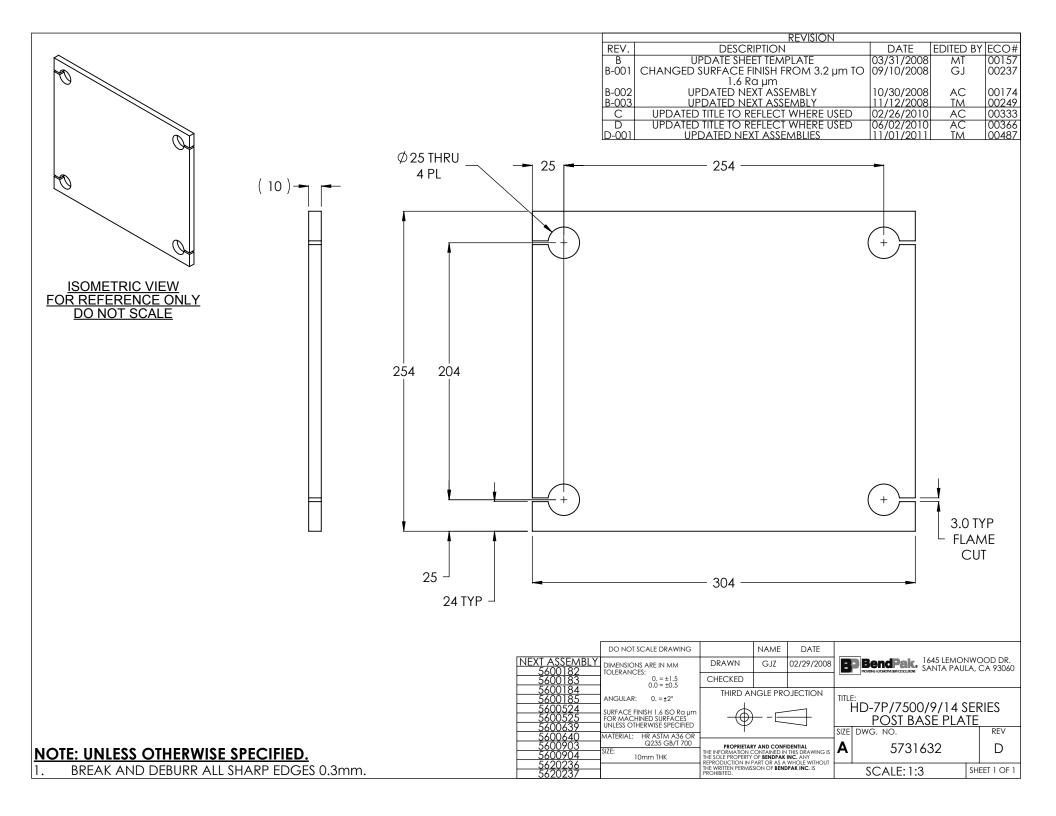



BENDPAK Number:	5900123
MRP Description:	HD-9 INSTALLATION MANUAL
Date:	05/12/2016
ECO:	00741

1. Engineering Specification

Application:

INSTALLATION MANUAL

Detailed Description:



Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			




BENDPAK Number:	5900147
MRP Description:	SAFETY MANUAL ALI / SM 93-1
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI SAFETY MANUAL

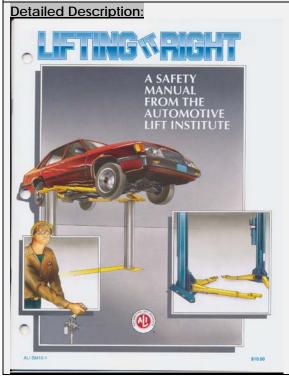

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			




BENDPAK Number:	5900152
MRP Description:	ALIGN OIM OPERATION INSPECTION & MAINTENANCE
Date:	12/28/2010
ECO:	00431

1. Engineering Specification

Application:

ALI OPERATION INSPECTION & MAINTENANCE MANUAL

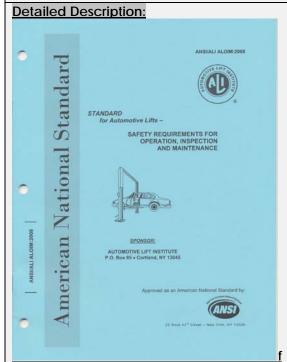

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905103
MRP Description:	WARNING ALI/WL 200
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

ALI 4 POST SAFETY STICKER KIT

Detailed Description:



SIZE: 11" L x 8.5" W (279mm x 216mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



BENDPAK Number:	5905151
MRP Description:	SAFETY TIPS CARD ALI-ST 90
Date:	12/28/2010
ECO:	00431

Application: ALI SAFETY TIPS Detailed Description: Automotive Lift SAFETY TIPS First free short with you when the you did as constant entered to your fit created. It inspects plays when the your did as the state of the your fit created. It inspects plays when the your did as the state of the your fit to your fit created. It inspects plays make the your did not be fitted with originative resound. It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit makes the resound Court black parts It inspects plays make the your fit to you fit to the short with originative resound. It inspects plays make the districtions present you found to the state with originative plays the man nature. It is allowed to the plays the plays the your fit to the short with the plays the plays the your fit to the your fit

2. Vendor Information Approved Vendor Vendor Part # Contact # Preferred Vendor 1)



BENDPAK Number:	5905311
MRP Description:	BENDPAK LABEL; 4 x 38" WHITE INK
Date:	05/13/2015
ECO:	00689

1. Engineering Specification

Application:

BENDPAK LABEL


Detailed Description:




SIZE: 38" L x 4.25" W (965mm x 108mm)

- Material: Yellow Represents Clear Adhesive PET
- Size: 4.25"W x 38"H
- Thickness: 4 Mil
- Finish: Polished
- Ink: U.V. protected, Opaque White
- Print Process: Silk Screen, 85 line-screen (Opaque White ink, clear adhesive PET will fill in blank areas.)
- Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection


Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

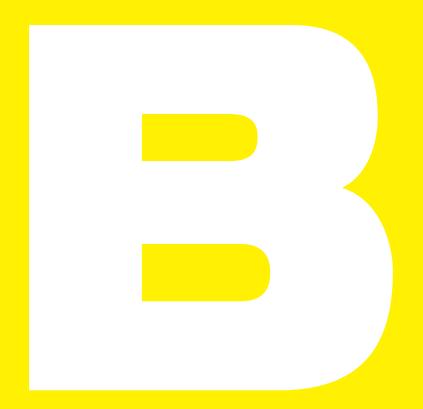



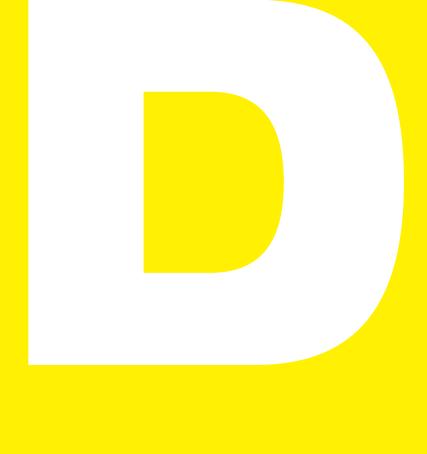



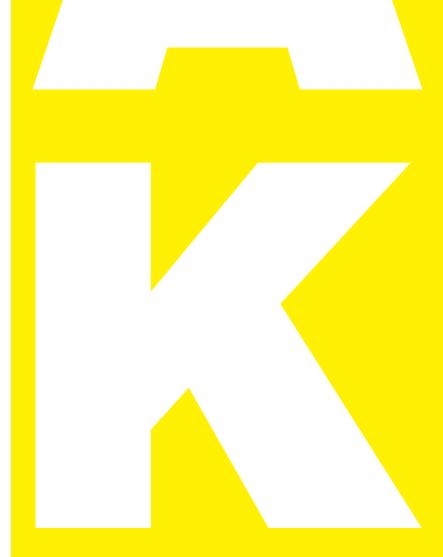



ABOVE-GROUND LIFTS





1645 Lemonwood Drive Santa Paula, CA 93060 U.S.A. (805) 933-9970 www.bendpak.com



BENDPAK Number:	5905402
MRP Description:	MAX CAP DANGER 9K
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

LIFT CAPACITY STICKER

Detailed Description:



THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg


Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.

<u>SIZE:</u> 5" L x 4" W (127mm x 100mm)

P/N 5905402

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			





ADANGER

THE MAXIMUM LIFTING CAPACITY FOR THIS LIFT IS DESCRIBED BELOW

Maximum Lifting Capacity 9000 lbs. / 4082 kg

Max. Lifting Cap. / Front of Lift Center 4500 lbs. / 2041 kg

Max. Lifting Cap. / Rear of Lift Center 4500 lbs. / 2041 kg

Exceeding the weight capacity of this lift can damage lift and/or property and may cause personal harm, injury or death to operators and/or bystanders. All vehicles MUST be positioned on lift with CENTER OF GRAVITY midway between adapters and/or centered on runways. Damage to lift due to overloading or misuse IS NOT covered under warranty.



BENDPAK Number:	5905465
MRP Description:	MANUFACTURER LABEL
Date:	05/07/2013
ECO:	00593

1. Engineering Specification

Application:

MANUFACTURER LABEL

Detailed Description:

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY
POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE
RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

SIZE: 5.125" L x 5.125" W (130mm x 130mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT

CAPACITY: MED/HVY DTY

POWER: ELECTRIC/HYDRAULIC

ANCHORS: AS EQUIPPED

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS

WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA



BENDPAK Number:	5905556
MRP Description:	4-POST SAFETY DECAL
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

4-POST SAFETY DECAL

Detailed Description:



SIZE: 23" L x 4" W (584m x 100mm)

Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			

ADANGER



SAFETY LOCKS ARE ENGAGED BEFORE ENTERING WORK AREA. Suspension components used on this lift are intended

to raise and lower lift only and are NOT meant to be load-holding devises. Remain clear of elevated lift unless visual confirmation is made that all primary safety locks are fully engaged and the lift is LOWERED onto the safety locks. Refer to installation/operation manual for proper safety lock procedures and/or further instruction.

WIRE ROPE INSPECTION AND MAINTENANCE

Lifting cables should be replaced every (3) three years or when visible signs of damage are apparent. DO NOT USE LIFT WITH DEFECTIVE OR WORN CABLES.

- Wire rope should be maintained in a well-lubricated condition at all times. Wire rope is only fully protected when each wire strand is lubricated both internal and external.
- Excessive wear will shorten the life of the wire rope. The factory suggests wire rope lubricant that penetrates to the core of the rope and provides long-term lubrication between each individual strand. In order to make sure that the inner layers of the rope remain well lubricated, lubrication should be carried out at intervals not exceeding three (3) months during operation.

 All sheaves and guide rollers in contact with the moving wire rope should be given regular visual checks for surface wear and lubricated to make sure that they run freely. This operation should be carried out at appropriate intervals
- generally not exceeding three (3) months during operation.
 For all sheave axles, the factory recommends standard wheel bearing grease. For all sheaves and/or guide rollers, the factory recommends 90-WT gear oil or similar heavy lubricant applied by any method including pump/spray dispensing, brush, hand and/or swabbing.

 Failure to read, understand and follow these instructions may cause death or serious injury. Read

IMPORTANT OPERATION / MAINTENANCE

INSTRUCTIONS - PLEASE READ

TO RAISE LIFT

✓ Set parking brake or use wheel chock to hold vehicle in position.
 ✓ Before raising vehicle, be sure all personnel are clear of lift and surrounding area. Pay careful attention to overhead clearances.
 ✓ Raise lift to desired height by pressing push button on power unit.
 ✓ Maintain visual contact with vehicle and surrounding area at all

and understand these instructions before using lift.

STOP IMMEDIATELY if load shifts or becomes unlevel. After vehicle is raised to desired height, lower lift onto the nearest

safety lock. Do not allow cables to become excessively slack.

ALWAYS INSURE ALL PRIMARY SAFETY LOCKS ARE ENGAGED

Press push button AIR SAFETY VALVE and HOLD.

times while lowering lift.

before entering work area.

descended completely.

maintenance.

Position vehicle tires at the center of each runway.

TO LOWER LIFT

Before lowering vehicle, be sure all personnel, tools and equipment are clear of lift and surrounding area.

Raise lift by pressing RAISE BUTTON on power unit. Elevate lift at

least two inches to allow adequate clearance for locks to clear.

Lower vehicle by pressing power unit lowering handle until lift has

ALWAYS make sure that ALL LOCKS are disengaged. If one of the locks inadvertently engages on descent, lift and/or vehicle may

When lowering lift PAY CAREFUL ATTENTION that all personnel and objects are kept clear.

ALWAYS keep a visual line of site on lift AT ALL TIMES.

disrupt causing personal injury or death.

- REQUIRED MONTHLY MAINTENANCE

 ✓ ALWAYS consult operation manual for factory recommended
 - Adjust lift cables to ensure lift raises level and safety locks engage simultaneously.
 Check all chain/cable connections, bolts and pins to insure
- proper mounting.

 ✓ Visually inspect safety locks for proper operation.

 ✓ Visually inspect concrete floor. DO NOT USE LIFT if concrete
- foundation shows signs of deterioration.

 Inspect all anchor bolts and retighten if necessary.
- ✓ Inspect all bolts and/or fasteners making sure they are properly secured.
 ✓ Make a visual inspection of ALL MOVING PARTS and check for

Check columns for squareness and plumb.

- excessive signs of wear.

 ✓ Replace ALL FAULTY PARTS before lift is put back into operation.
- WARNING: If cement anchor bolts are loose, or any component
- of the lift is found to be defective, DO NOT USE LIFT!

 2. Never operate the lift with any person or equipment below.
- Never exceed rated capacity.
 Always insure safety locks are engaged before any attempt is
- made to work on or near vehicle.
- 5. Never leave lift in an elevated position unless the safety locks are engaged.6. Do not permit electric motor to get wet! Motor damage caused

by dampness is not covered under warranty.



BENDPAK Number:	5905940
MRP Description:	PRODUCT DATA LABEL
Date:	05/06/2013
ECO:	00593

1. Engineering Specification

Application:

PRODUCT DATA LABEL

Detailed Description:



SANTA PAULA, CA USA WWW.BENDPAK.COM

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS POWER: ELECTRIC/HYDRAULIC INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OPERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM 6488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC). AND/OR INTERNATIONAL BUILDING CODE (IBC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA

SIZE: 2.3" L x 4.5" W (58mm x 114mm)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)			



SANTA PAULA, CA USA WWW.BENDPAK.COM PN 5905940

LIFT TYPE: SURFACE MOUNT CAP: MED/HVY DTY MFG. BPK SEE DATA PLATE FOR PRODUCT DETAILS

POWER: ELECTRIC/HYDRAULIC

INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SAFETY INSTRUCTIONS: IF ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS THAT ARE LOCATED IN THE LOAD PATH, AFFECT OF PERATION OF THE LIFT, AFFECT THE LIFT ELECTRICAL LISTING OR AFFECT INTENDED VEHICLE ACCOMMODATION ARE USED ON THIS LIFT AND, IF THEY ARE NOT CERTIFIED FOR USE ON THIS LIFT, THEN THE CERTIFICATION OF THIS LIFT SHALL BECOME NULL AND VOID. CONTACT THE PARTICIPANT FOR INFORMATION PERTAINING TO CERTIFIED ATTACHMENTS, ACCESSORIES OR CONFIGURATION MODIFYING COMPONENTS.

BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE CRITERIA AS PRESCRIBED BY ASTM E488 - 96(2003). LIFT BUYERS ARE RESPONSIBLE FOR ANY SPECIAL REGIONAL STRUCTURAL AND/OR SEISMIC ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR INTERNATIONAL BUILDING CODE (BC).

THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

DO NOT REMOVE

ENGINEERED BY BENDPAK INC. USA

MADE IN CHINA



BENDPAK Number:	5905953
MRP Description:	LABEL D (4-POST LIFTS CE)
Date:	12/04/2015
ECO:	00724

1. Engineering Specification **Application:** DATA SERIAL TAG, 4-POST LIFTS, CE **Detailed Description:** Santa Paula, CA USA www.bendpak.com BP BendPak SIZE: 3.38" L x 3.38" W MODEL NUMBER SERIAL NUMBER (85.7mm x 85.7mm) LIFT CAPACITY DATE OF MFG. ROLLING JACK MAX CAP. MAX PSI / BAR VOLTAGE 110-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph 208-240VAC, 50-60 Hz, 1 Ph 208-440VAC, 50-60 Hz, 3 Ph DANGER! Disconnect Power Before Servicing (€ ∰ [H] PN 5905953

2. Vendor Information (Or for Reference)

	Approved Vendor	Vendor Part #	Contact #	Preferred Vendor
1)				
2)				
OR BENDPAK ENGINEERING APPROVED EQUIVALENT				



Santa Paula, CA USA www.bendpak.com

MODEL NUMBER

SERIAL NUMBER

ROLLING JACK MAX CAP.

LIFT CAPACITY

MAX PSI / BAR

DESCRIPTION

VOLTAGE

- 110-240VAC, 50-60 Hz, 1 Ph
- 380-415VAC, 50-60 Hz, 3 Ph 208-440VAC, 50-60 Hz, 3 Ph
- 208-240VAC, 50-60 Hz, 1 Ph

DATE OF MFG.



WARRANTY VOID IF DATA PLATE IS REMOVED





PN 5905953



2016 CE-Approved 4 Post Lifts Colors & Graphics

4/7/16

CONFIDENTIAL INFORMATION.

You may not disclose, print, copy or disseminate this information.

Unauthorized use is a violation of federal criminal law.

4 Post Lifts Product Decal Positioning







C



Ali_4_Post_labels.pdf: (Order Labels from ALI)

Total of 4

PN 5905311

${\bf BPK\ Post\ Branding\ Decal\text{-}Large_5905311.pdf:}$

Material: Clear Adhesive PET Size: 4.25"W x 38"H Thickness: 4 Mil

Finish: Polished

Ink: U.V. protected, Opaque White

Print Process: Silk Screen, 85 line-screen (Yellow color in file represents what should be clear PET material and SHOULD NOT print as Yellow ink. White area in file represents Opaque White ink.)

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

4_Post_Safety_Decal.pdf:

Size: 4"W x 23"H

Material: White Vinyl Pressure Sensitive Adhesive

PN 5905556

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen


or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion,

chemical, and ultra violet protection

4 Post Lifts Product Decal Positioning





P/N 5905401 - Max Cap. Danger 7k P/N 5905695 - Max. Cap. Danger 7500 P/N 5905402 - Max Cap. Danger 9k P/N 5905557 - Max. Cap. Danger 14K P/N 5905406 - Max Cap. Danger 18k P/N 5905407 - Max. Cap. Danger 27K P/N 5905408 - Max. Cap. Danger 35K P/N 5905409 - Max. Cap. Danger 40K *Max. Cap. Danger.pdf:

Size: 4"W x 5"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

MAXIMUM LIFTING CAPACITY Lbs. Kg.

P/N 5905645 - NRTL_Lifting_Cap_Label_7K
P/N 5905700 - NRTL_Lifting_Cap_Label_7500
P/N 5905650 - NRTL_Lifting_Cap_Label_9k
P/N 5905665 - NRTL_Lifting_Cap_Label_14k
P/N 5905675 - NRTL_Lifting_Cap_Label_18k
P/N 5905680 - NRTL_Lifting_Cap_Label_27k
P/N 5905685 - NRTL_Lifting_Cap_Label_35K
P/N 5905690 - NRTL_Lifting_Cap_Label_40K

*NRTL_Lifting_Cap_Label_.pdf:

Size: 4.5"W x 3.25"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection

*DEPENDS ON LIFT MODEL AND CAPACITY



PN 5905940

Product_Data_Label_5905940-New.pdf:

Size: 4.5"W x 2.3"H

Material: White Vinyl Pressure Sensitive Adhesive

Thickness: 4 Mil

Ink: U.V. protected CMYK 2/C Process

Finish: Polished

Print Process: Offset Lithography - 200 line-screen

or 300 p.p.i. for digital

Lamination: Clear-gloss over-laminate for abrasion, chemical, and ultra violet protection



PN 5905953

2015_Serial_Tag-D-5905953.jpg:

Size: 3"W x 3"H

Material: Material: 2 Mil. Matte Silver Polyester


(Flex-PSE)

Print using thermal transfer printer with resin ribbon


Ink: 1 Color-Black



4 Post Lifts Product Decal Positioning

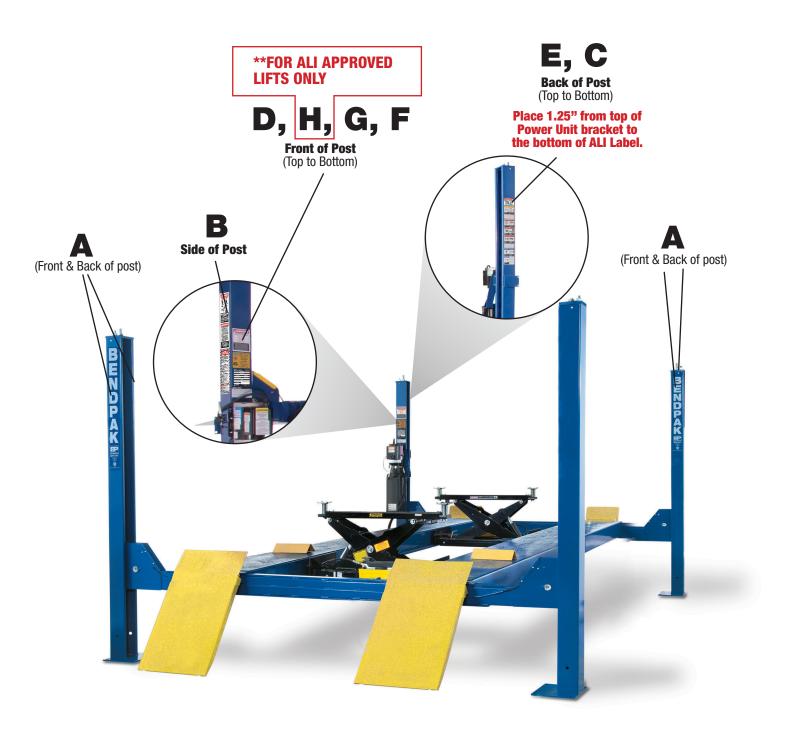

4 Post Lifts Packaging

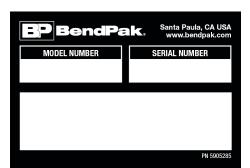

Serial Tag New-2015 Peel Off-5905285.jpg:

Size: 3"W x 3"H

Material: 2 Mil. Matte Silver Polyester (Flex-PSE) Print using thermal transfer printer with resin ribbon Ink: 1 Color-Black

PEEL OFF INVENTORY LABEL

SERIAL NUMBER

Do not remove back sheet of this portion to prevent from sticking completely as shown in image.





MFD. BY BENDPAK INC.

LIFT TYPE: SURFACE MOUNT CAPACITY: MED/HVY DTY
POWER: ELECTRIC/HYDRAULIC ANCHORS: AS EQUIPPED
INSTALLATION - SEE OWNERS GUIDE OR CONTACT FACTORY

SHIPPING DAMAGE CLAIMS
WHEN THIS EQUIPMENT IS SHIPPED, TITLE PASSES TO THE PURCHASER
UPON RECEIPT FROM THE CARRIER. CONSEQUENTLY, CLAIMS FOR THE
MATERIAL DAMAGED IN SHIPMENT MUST BE MADE BY THE PURCHASER
AGAINST THE TRANSPORTATION COMPANY AT THE TIME SHIPMENT IS
RECEIVED.

PLEASE READ ALL OPERATORS/USERS MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. UNDERSTAND AND COMPREHEND THE FULL CONTENTS OF EACH MANUAL(S) PRIOR TO INSTALLATION AND OPERATION. DELIVER THE MANUAL(S) TO ALL OPERATORS. FAILURE TO OPERATE THIS EQUIPMENT AS DIRECTED MAY CAUSE INJURY OR DEATH.

IMPORTANT NOTE:
BENDPAK LIFTS ARE SUPPLIED WITH CONCRETE FASTENERS MEETING THE
CRITERIA AS PRESCRIBED BY ASTM E488 — 96(2003). LIFT BUYERS ARE
RESPONSIBLE FOR ANY SECULA REGIONAL STRUCTURAL AND/OR SEISMIC
ANCHORING REQUIREMENTS SPECIFIED BY ANY OTHER AGENCIES AND/OR
CODES SUCH AS THE UNIFORM BUILDING CODE (UBC) AND/OR
INTERNATIONAL BUILDING CODE (IBC).



INTERNAL BAR CODE - FOR FACTORY AUDIT ONLY 34086

BPK STYOT P20KVR X18576 HVY DTY/ GVR 832
THE MANUFACTURE, USE, SALE OR IMPORT OF THIS PRODUCT MAY BE SUBJECT TO ONE OR MORE UNITED STATES PATENTS, OR PENDING APPLICATIONS, OWNED BY BENDPAK, INC.

ENGINEERED BY BENDPAK INC USA

MADE IN CHINA

Manufacturer Packaging Label:

Size: 5"W x 5"H

Material: White adhesive paper Ink: U.V. protected CMYK 2/C Process

Print Process: Offset Lithography - 200 line-screen or 300

p.p.i. for digital